

carreaux de tapis

Richmond

carpet tile

Interlace



ENTWINE
RCO0002INTE19

SPECIFICATIONS

Fibre Type: 100% Solution Dyed BCF Polypropylene

Backing: EcoBak Modular (100% PVC free)

Tile Size: 19.7" x 19.7"

Dye Method: Solution Dyed

Construction: Multi-Level Loop

Pile Face Weight: 18 oz

Pile Height: 2.5 - 5mm

Stitches Per Inch: 10

Number of Colours: 4

Gauge: 1/12"

Recommended Adhesive: Mapei Ultrabond ECO 811

Installation Methods: Quarter Turn, Modified Ashlar

PERFORMANCE TESTING

Flammability/Radiant Panel: ASTM E648 CLASS 1

Smoke Density: ASTM E662 < 450

Colourfastness: AATCC16 = 5.0

Static Generation: AATCC 134 < 3.5kv

Stain Resistance: AATCC 175-2003 = 10

SUSTAINABILITY & CERTIFICATIONS

CRI Indoor Air Quality: GLP 1727

Greenguard: Yes

Recycled Content: Approx. 20% in backing

PACKAGING

Tiles/Carton: 20

SY/Carton: 5.98

Carton Weight: 37.5 lbs

Cartons/Pallet: 32

WARRANTY

Wear: Lifetime

Delamination: Lifetime

Dimensional Stability: Lifetime

Backing Performance: Lifetime



SHNIER
STEP AHEAD • À L'AVANT-GARDE


carreaux de tapis

Richmond
carpet tile


Interlace



MESH
RCO0001INTE19

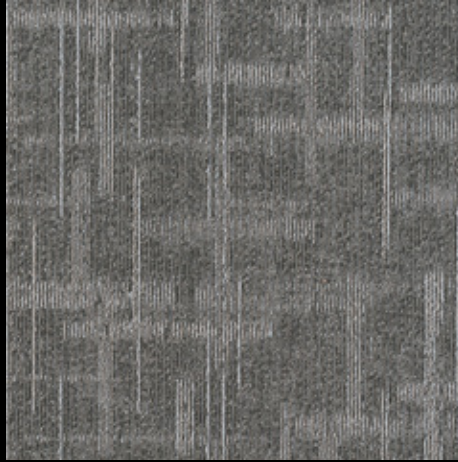

ENTWINE
RCO0002INTE19

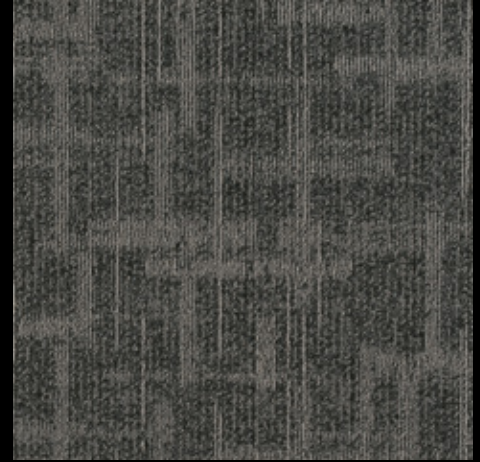

WEAVE
RCO0003INTE19



MERGE
RCO0006INTE19





ENTWINE
RCO0002INTE19

SPÉCIFICATIONS

Type de fibre: 100% Teint masse BCF Polypropylene

Sous-couche: Modulaire EcoBak (exempte de PVC à 100 %)

Dimension des carreaux: 19,7 po x 19,7 po

Procédé de teinture: Teint masse

Construction: Boucle à plusieurs niveaux

Poids du velours: 18 oz

Hauteur du velours: 2,5 - 5 mm

Points par pouce: 10

Nombre de couleurs: 4

Calibre: 1/12 po

Adhésif recommandé: Mapei Ultrabond ECO811

Méthodes d'installation: Quart de tour, ashlar modifié

ESSAIS DU RENDEMENT

Inflammabilité / panneau rayonnant: ASTM E648 CLASSE 1

Densité de fumée: ASTM E662 < 450

Solidité de la couleur: AATCC16 = 5,0

Génération d'électricité statique: AATCC 134 < 3,5kv

Résistance aux taches: AATCC 175-2003 = 10

DURABILITÉ ET CERTIFICATIONS

CRI Qualité de l'air intérieur: GLP 1727

Greenguard: Oui

Contenu Recyclé: Approx. 20% in backing

EMBALLAGE

Carreaux/carton: 20

Verge carrée/carton: 5.98

Poids du carton: 37.5 lbs

Cartons/palette: 32

GARANTIE

Usure: Durée À vie

Décollement: Durée À vie

Stabilité dimensionnelle: Durée À vie

Rendement de la sous-couche: Durée À vie



carreaux de tapis


Richmond

carpet tile


Interlace



MESH
RCO0001INTE19

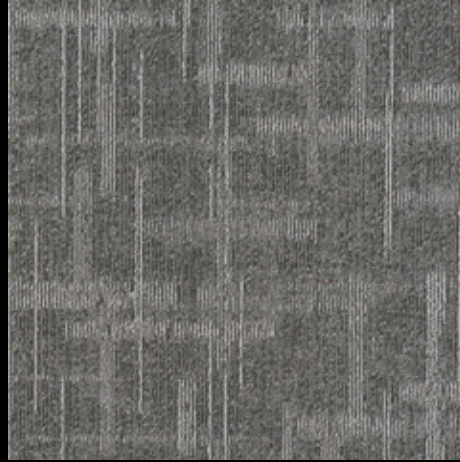

ENTWINE
RCO0002INTE19

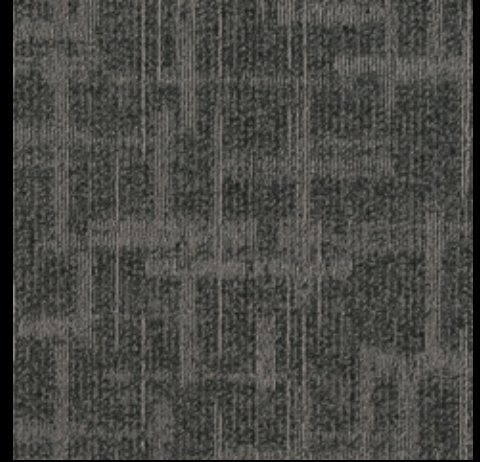

WEAVE
RCO0003INTE19



MERGE
RCO0006INTE19



SHNIER
STEP AHEAD • À L'AVANT-GARDE