



TRUE
RC00004STRI24

SPECIFICATIONS

Fibre Type: 100% Solution Dyed BCF Nylon

Backing: EcoBak Modular (100% PVC free)

Tile Size: 23.6" x 23.6"

Dye Method: Solution Dyed

Construction: Multi-Level Loop

Pile Face Weight: 16 oz

Pile Height: 2.5 - 5mm

Stitches Per Inch: 10

Number of Colours: 5

Gauge: 1/12"

Recommended Adhesive: Mapei Ultrabond ECO 811

Installation Methods: Quarter Turn, Modified Ashlar

PERFORMANCE TESTING

Flammability/Radiant Panel: ASTM E648 CLASS 1

Smoke Density: ASTM E662 < 450

Colourfastness: AATCC16 = 5.0

Static Generation: AATCC 134 < 3.5kv

Stain Resistance: AATCC 175-2003 = 9

SUSTAINABILITY & CERTIFICATIONS

CRI Indoor Air Quality: GLP 1795

Greenguard: Yes

Recycled Content: Approx. 20% in backing

PACKAGING

Tiles/Carton: 14

SY/Carton: 6.03

Carton Weight: 37.5 lbs

Cartons/Pallet: 20

WARRANTY

Wear: Lifetime

Delamination: Lifetime

Dimensional Stability: Lifetime

Backing Performance: Lifetime



carreaux de tapis

Richmond
carpet tile

Striation



DEFINITE
RCO0001STRI24




PRECISE
RCO0002STRI24



FINE
RCO0003STRI24



TRUE
RCO0004STRI24

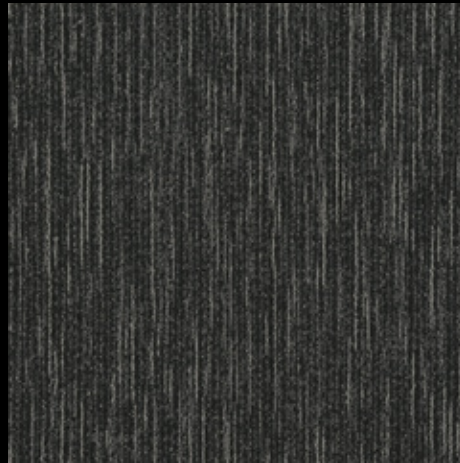

UNBROKEN
RCO0005STRI24



SHNIER
STEP AHEAD • À L'AVANT-GARDE



TRUE
RC0004STRI24

SPÉCIFICATIONS

Type de fibre: 100% Teint masse BCF Nylon

Sous-couche: Modulaire EcoBak (exempte de PVC à 100 %)

Dimension des carreaux: 23,6 po x 23,6 po

Procédé de teinture: Teint masse

Construction: Boucle à plusieurs niveaux

Poids du velours: 16 oz

Hauteur du velours: 2,5 - 5 mm

Points par pouce: 10

Nombre de couleurs: 5

Calibre: 1/12 po

Adhésif recommandé: Mapei Ultrabond ECO811

Méthodes d'installation: Quart de tour, ashlar modifié

ESSAIS DU RENDEMENT

Inflammabilité / panneau rayonnant: ASTM E648 CLASSE 1

Densité de fumée: ASTM E662 < 450

Solidité de la couleur: AATCC16 = 5,0

Génération d'électricité statique: AATCC 134 < 3,5kv

Résistance aux taches: AATCC 175-2003 = 10

DURABILITÉ ET CERTIFICATIONS

CRI Indoor Air Quality: GLP 1795

Greenguard: Yes

Recycled Content: Approx. 20% in backing

EMBALLAGE

Tiles/Carton: 14

SY/Carton: 6.03

Carton Weight: 37,5 lbs

Cartons/Pallet: 20

GARANTIE

Usure: Durée À vie

Décollement: Durée À vie

Stabilité dimensionnelle: Durée À vie

Rendement de la sous-couche: Durée À vie



carreaux de tapis

Richmond

carpet tile


Striation



DEFINITE
RCO0001STRI24




PRECISE
RCO0002STRI24

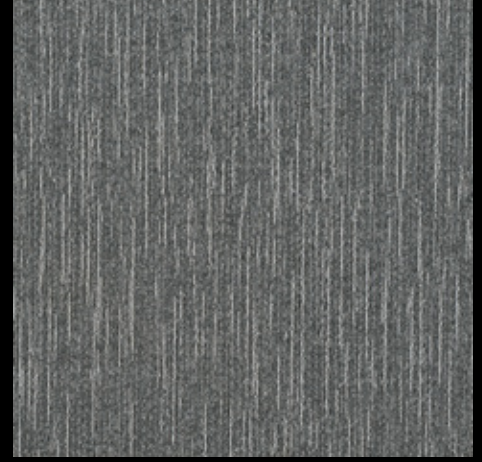

FINE
RCO0003STRI24



TRUE
RCO0004STRI24

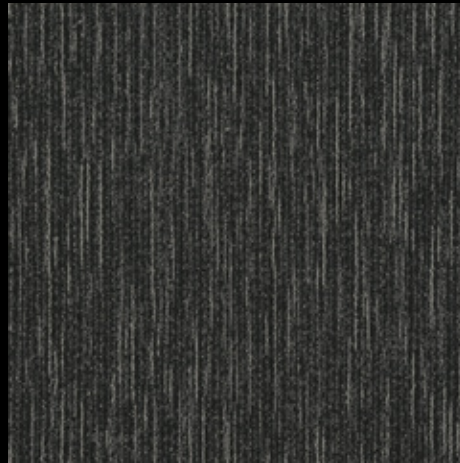

UNBROKEN
RCO0005STRI24

