



TOILET USER MANUAL



PEARLSINKS.COM


INTRODUCTION

Thank you for purchasing an authentic Pearl® toilet. Crafted out of the highest quality non-porous fireclay ceramic, each and every toilet was tested and carefully inspected by hand before they left our factory.


Before you begin, please read the instructions carefully to prevent any malfunction or damage to your plumbing and property.

TOOLS


The tools below may be needed to complete the installation. For additional information, check with your local hardware store on the requirements for your installation.



Phillips Screwdriver




Flathead Screwdriver



Putty Knife



Measuring Tape



Sealant



Wax Ring



Level



Adjustable Wrench



Safety Glasses


BEFORE YOU BEGIN

- Read all instructions carefully before beginning installation.
- Assemble all the tools you might need.
- Turn off main water supply valve before removing old toilet.
- Empty and dry toilet tank and bowl completely.
- Clean surfaces and work area before proceeding with installation.
- Cover openings or drainage to prevent small parts from getting lost.
- Completely remove old mounting hardware and toilet.
- Plug the flange opening to prevent inhaling hazardous gases
- We always recommend that the installation be performed by a licensed professional.

MOUNTING TOILET

1. **Turn off** all water supply lines.
2. Mount closet flange and closet bolts 6" apart and minimum 12" from the wall. (Figure i)
3. Flip the toilet over onto a towel or cushioned surface and install the wax ring in the flange channel on the toilet. Apply a thin layer of sealant around the base.
4. Remove the plug from the flange opening. Set toilet onto the closet flange while matching the closet bolts to the mounting holes. (Figure i)
5. Loosely install washers and nuts.
6. Once the position of the toilet is decided, firmly press down the toilet and use a rocking motion to ensure proper sealing on the flange.
7. Tighten nuts and make sure to alternate between the two. Do not overtighten nuts because vitreous china can easily crack or chip.
8. Place sealant around the base. Remove and smooth over excess.

Figure i

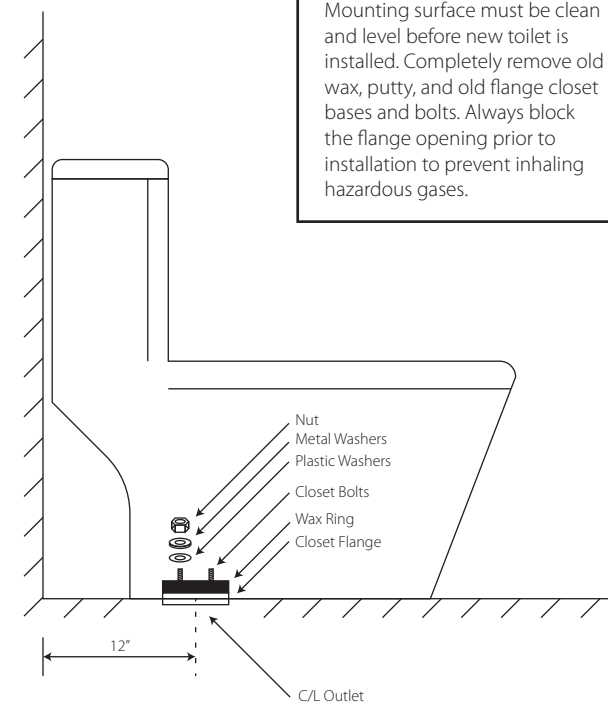


HELPFUL HINT:

Mounting surface must be clean and level before new toilet is installed. Completely remove old wax, putty, and old flange closet bases and bolts. Always block the flange opening prior to installation to prevent inhaling hazardous gases.

WATER CONNECTION

Figure A

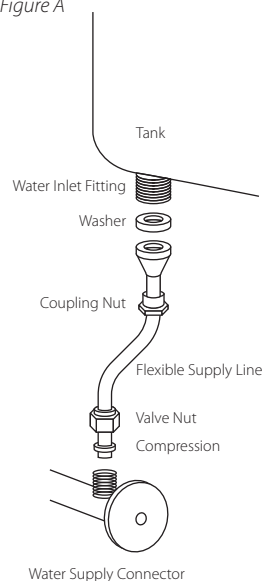

NOTE:

3/8 female to 7/8 ballcock supply line not included

1. Turn off all water supply lines and drainage lines.

2. Connect water supply to the inlet fitting. Tighten the coupling nuts securely.

3. Turn on supply valve and allow tank to fill until float rises to shut off position.

4. Check for leaks at fittings, tighten as needed.

MAINTENANCE

Simply rinse the surface of the toilet with clear warm water and soap. For tougher grime rinse with a mild liquid detergent if necessary. Dry the toilet with clean soft cotton cloth.



Do NOT use any acidic cleaning solutions, abrasive cleaners, harsh cleaners, or in-tank cleaners as it may damage the ceramic structure or glaze finish of your toilet. Seat is plastic and can be damaged with chemical or abrasive products.

WARRANTY

PEARL® offers a Limited (1) Year Warranty for its toilets.

This warranty covers manufacturing defects in material and workmanship of PEARL® toilets (Hereinafter referred to as the "Product") only.

Warranty starts from the invoice date of the Products. Any returned materials must be accompanied by a return requisition form and number from PEARL® RMA requisition department.

Proof of purchase may be required in order to be valid for warranty benefits.

(Commercial applications are not applicable to any warranty below).

Toilet Coverage: PEARL® will provide a 1 year supply of replacement cartridges for its flushing mechanism.*

Exclusive Remedy: In the event of any defect in the Product that breaches the foregoing warranties, PEARL®, at its option, will repair or replace the defective part of the Product. PEARL® is to be notified describing the problem to claim the defective product. To notify PEARL® and receive assistance or service under this warranty, the original purchaser may: (1) call 1-604-242-1601 where a consumer service representative will be able to assist you, or (2) write the consumer service department c/o PEARL®, Unit 120, 1231 Burdette Street, Richmond BC, V6V 2Z2, and include a description of the problem, model number, location of purchase, your name, address, phone number and approximate date of purchase, or (3) email PEARL® customer service department by going to www.pearlsinks.com/contact-us, or (4) notify the location or distributor from which the Product was purchased. You may be required to return the Product to PEARL® for inspection and proof of purchase may be required.

Limitations and Exclusions: PEARL® WILL NOT BE LIABLE FOR ANY OTHER DAMAGES OR LOSSES, INCLUDING, BUT NOT LIMITED TO, INCIDENTAL AND/OR CONSEQUENTIAL DAMAGES, REGARDLESS OF THE LEGAL THEORY ASSERTED, INCLUDING ANY CLAIM OR BREACH OF WARRANTY HEREUNDER OR ANY OTHER CAUSE, AND WHETHER ARISING IN CONTRACT OR IN TORT (including negligence and strict liability).

The above warranties do not cover any labour, natural wear and tear due to regular use to the surface finishing of the product, damage resulting from improper maintenance, repair, cleaning or installation, misuse, abuse, alterations, accidents, natural deposits, natural oxidation and erosion, or acts of God. Damage to the product caused by accident, misuse or abuse is not covered by this warranty. Failure to comply with cleaning instructions may void this PEARL® Warranty. PEARL® will not cover other costs associated with reinstallation or replacement of the product or its accessories.

If any malfunctions occur or if installation assistance is needed, please contact PEARL® Consumer Service at www.pearlsinks.com, you can also email us at info@pearlsinks.com or call us at 1-604-242-1601.

*Labour, shipping and handling not included

TOILET SEAT INSTALLATION

1. Remove the toilet seat cover from the mounting bracket.
3. Install the mounting bracket with the included screws and anchors.
4. Adjust the bracket and tighten screws.
5. Attach toilet seat cover to the bracket.

TESTING

1. Turn on water supplies and check all connections for leaks. If there are leaks, turn off water supplies and check to see if proper washers were used.
2. Make sure all openings and cracks are sealed properly with sealant.
3. Test the EcoMax™ dual flush system and inspect the refill mechanism for any malfunction.

PEARLSINKS.COM

Save this manual for future use