



www.lxhausys.com

H•FLOR

Grande Style

Looselay Plank
5 mm/20 mil



Resilient Flooring

Grande Style




Plank 8 Colors



Featured Color: 1381 Golden Oak

Product Configuration

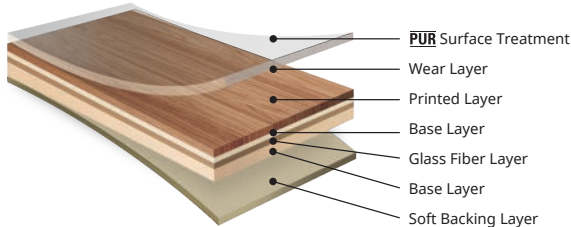

Features

- ECO- & HUMAN-FRIENDLY**
 - FloorScore® and DIBt certified for low VOCs
 - Phthalate-Free (DEHP·DBP·BBP·DIDP·DINP·DNOP) & Heavy Metal-Free (Cd·Pb·Hg·Cr6+)
 - Made from 100% virgin vinyl
- EXCELLENCE IN DESIGN**
 - High-resolution imaging and patterns for realistic wood visuals
- DURABILITY**
 - PUR double coating improves resistance to scratches and stains
 - 10 Years Heavy Commercial Warranty
- FAST INSTALLATION WITHOUT GLUE AND EASY REPLACEMENT**
 - Non-slip backing sheet
- SUPERIOR DIMENSIONAL STABILITY**
 - Manufactured with fiber glass

All specifications are subject to change without notice. Application images are CGI renderings that are shown for illustration purpose only. Printed representation of colors may vary from actual product. Please view the actual product prior to purchase.

Specifications

COLLECTION NAME	Grande Style	
TOTAL # SKUs (Colors)	8	

PRODUCT SPECIFICATIONS/CONTENT/CERTIFICATIONS	DETAILS	ADDITIONAL INFORMATION
Thickness	5.0 mm (0.197")	
Wear Layer	20 mil (0.5 mm)	
Glass Fiber	Yes	
Finishing/Coating	Enhanced UV Urethane Coating	
Nominal Dimensions (inches)	Plank (9" x 60")	
Actual Dimensions (mm)	Plank (228.6 mm x 1,524 mm)	
Micro-Beveled	No	
Class/ASTM F1700	Class III Printed Film Vinyl Tile - Type B (embossed)	
Backing Class	Commercial Grade	
Gloss Level	5 - 12	
Commercial Traffic	Heavy Commercial	
Added Antimicrobial	No	
Recycled Contents	100% Virgin Vinyl	
Backstamp Info	None	
CE Certification	Yes	
PACKING SPECIFICATIONS	DETAILS	ADDITIONAL INFORMATION
Pallet Dimensions (L x W x H)	1,600 x 1,000 x 673 (mm)	
Square Feet per Plank	3.75	
Square Feet per Box	22.50	
Square Feet per Pallet	1,350.00	
Square Feet per Container	18,900.00	20 foot container
Weight per sq ft (lbs.)	1.77	
Weight per Plank (lbs.)	6.65	
Weight per Box (lbs.)	39.93	
Weight per Pallet (lbs.)	2,395.51	
Weight per Container (lbs.)	33,537.07	
Pieces per Box	6	
Boxes per Pallet	60	
Box Type	Corrugated	
Pallet per Container	14	
Boxes per Container	840	
PRODUCT PERFORMANCE/TESTING	PERFORMANCE	ASTM REQUIREMENT
ASTM F2055 Size and Tolerance	Passes	As specified 0.016 in./lin.ft.
ASTM F386 Thickness	Passes	As specified 0.005 in./lin.ft.
ASTM F2055 Squareness	Passes	Max. 0.010 in.
ASTM F1914 Residual Indentation	Passes	Avg. < 8%
ASTM F137 Flexibility	Passes 6 mm mandrel	1 in. (25.4 mm) mandrel/no crack or break
ASTM F2199 Dimension Stability	Passes	< 0.020 in./ft.
ASTM F925 Chemical Resistance	Passes	No change/slight change
ASTM F1514 Resistance to Heat	Passes	< 8 (delta E) avg.
ASTM F1515 Resistance to Light	Passes	< 8 (delta E) avg.
ASTM E648 Critical Radiant Flux	Class 1	Class 1 (< 0.45 W/cm²)
ASTM E662 Optical Smoke Density	Passes	< 450
ASTM C1028 Slip Resistance	Passes	ADA Compliant (> 0.50)
ASTM F970 Static Load	1,000 psi	250 psi (< 0.005 in.)
TECHNICAL INFORMATION/DOCUMENTS	DETAILS	ADDITIONAL INFORMATION
Product Warranty	10 Years Heavy Commercial	
Installation Method	Full spread	
Approved Installation Locations	Above, Below, and On-Grade	
Recommended Adhesive	Any approved LVT adhesive	
Polish Required (Yes/No)	No	



1380 Classic Oak



1381 Golden Oak



1382 Camelon Oak



1383 Grey Oak



1384 Treasure Oak



1385 Brown Oak



1386 Tasmanian Oak



1387 Beige Oak



Featured Color: 1382 Camelon Oak

H·FLOR

by LX Hausys



LX Hausys America, Inc.
900 Circle 75 Parkway, Suite 1500
Atlanta, GA 30339
Toll Free 866-544-4622
Email flooring@lxhausys.com
www.lxhausys.com