

H·FLOR

SPACIOUS ELEGANCE

PRESTG
XL



PRESTG XL

Reimagine the comforts of home with PRESTG XL. Extra-large planks, measuring 9" x 60", create a spacious, relaxed environment. Refined wood grains, neutral color palettes, and a textured surface create an authentic look and feel. Discover PRESTG XL, the foundation for all your design aspirations.


Modern Minimalist

Embrace the power of simplicity with a "less is more" style that balances any design concept. Lighter wood tones, softened grains, refined textures, and larger planks help create a comfortable space perfect for today's mobile lifestyles. Discover the beauty of basics done well.



Coastal

Design a serene oasis with PRESTG XL large format planks. Escape the hustle of modern life with sun-kissed wooden tones evoking the beauty of sand, sea, light, and water. Perfect for open spaces, PRESTG XL turns homes into sanctuaries, fostering connection, reflection, and relaxation.

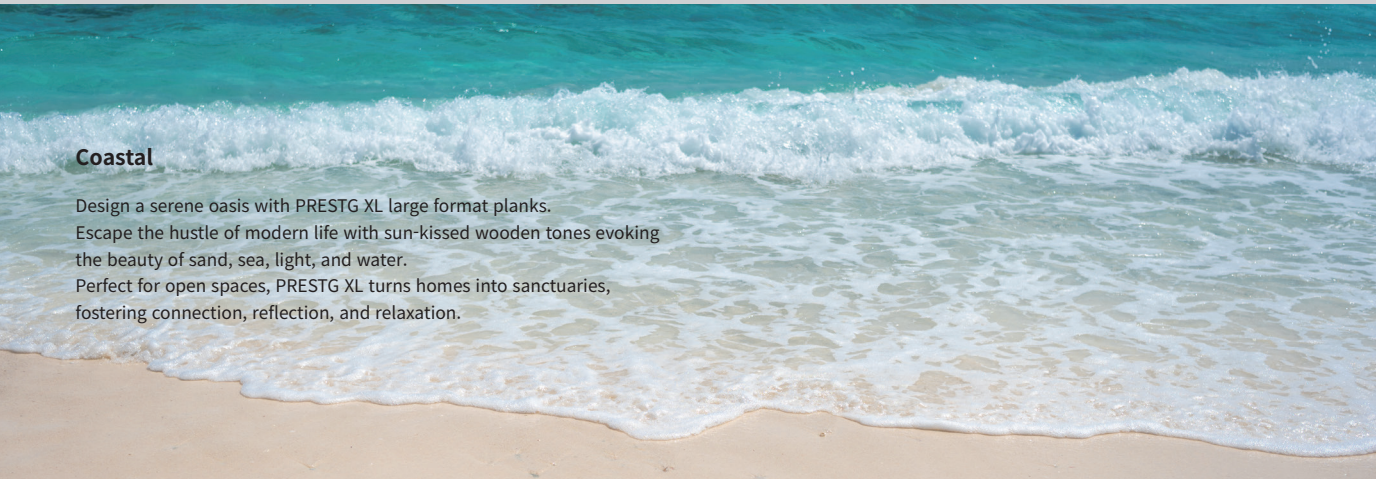

Legacy

Rediscover the simple joy of being at home and create a legacy of style. With its brushed texture and warm earthy tones, PRESTG XL provides a foundation for lasting memories. Its classic wood aesthetic adds comfort and builds on the traditions of family, community, and local living.



PRESTG XL offers a blank canvas for creativity. With exceptional durability, easy installation, water and wear resistance, noise reduction, and a universal wood color palette, PRESTG XL helps you create a serene and balanced environment for modern living.



7982 | Natural Hickory



7985 | Natural Oak



7991 | Wheat Oak



7986 | Blonde Oak



7981 | Nordic Hickory



7984 | Vanilla Oak



7989 | Weathered Oak



7990 | European Oak



7988 | Stone Mountain Oak



7992 | Smoked Oak



7987 | Chocolate Oak



7983 | Timbered Hickory

EXTRA LARGE PLANK

By approximately doubling the pattern size in comparison to conventional flooring, PRESTG XL is able to display large, beautiful pattern visuals.



C-EIR (Continuous Embossed in Register)
C-EIR is LX Hausys' innovative embossing technique. This technology imprints captivating effects onto the surface synchronizing the high definition image resulting in the authentic texture of wood and ceramic materials and ultimate real feel.

5Gi Locking System
Our click structure allows for a floating floor installation where flooring is installed over the existing floor and can be restored to the original state when removed.

Water Guard SPC Core
SPC Core is highly resistant to water and moisture compared to other types of flooring. It will stand strong against water, maintaining its original appearance.

Stone Shield
Exceptional anti-scratch performance

Water Guard
No deformation from water

Transfer Guard
Reduces prep time and ensures smooth installation (no "telegraphing")

5Gi Locking System
Shortens installation time and ensures flush joints

Easy Installation
Shortened installation time and maximized coherence by applying 5Gi structure


IXPE Foam Layer
Excellent Stability and underfoot Comfort

Sound Reduction
Sound reduction by 21 dB (ISO 717-2:2013)

Top-of-class Sound Reduction
IIC rating: 64 (ASTM E90)

Features

- Stone Shield**
Exceptional anti-scratch performance
- Water Guard**
No deformation from water
- Transfer Guard**
Reduces prep time and ensures smooth installation (no "telegraphing")
- 5Gi Locking System**
Shortens installation time and ensures flush joints
- Easy Installation**
Shortened installation time and maximized coherence by applying 5Gi structure
- IXPE Foam Layer**
Excellent Stability and underfoot Comfort
- Sound Reduction**
Sound reduction by 21 dB (ISO 717-2:2013)
- Top-of-class Sound Reduction**
IIC rating: 64 (ASTM E90)

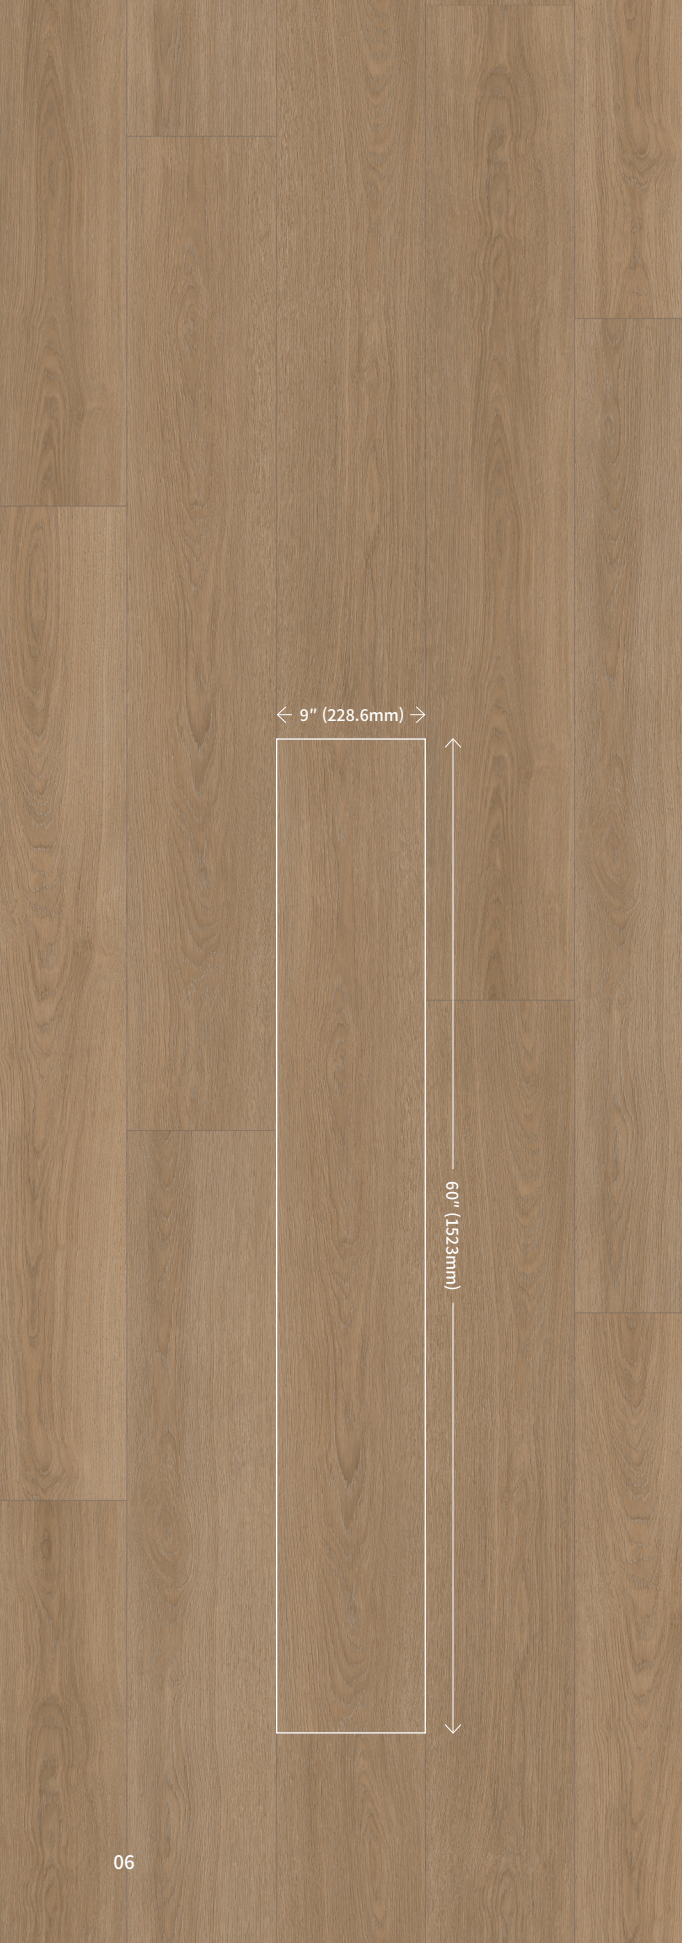

← 9" (228.6mm) →

60" (1523mm)



7985 Natural Oak



7981 Nordic Hickory



7988 Stone Mountain Oak

SPECIFICATION

H·FLOR

COLLECTION NAME	PRESTG XL
SELLING STYLE #(s)	PRESTG XL
TOTAL # SKU'S(COLORS)	12

PRODUCT SPECIFICATIONS / CONTENT / CERTIFICATIONS	DETAILS	ADDITIONAL INFORMATION
Thickness	6.0mm (0.236 in)	with 1.5mm IXPE Foam
Wear Layer	20mil (0.5mm)	
Glass Fiber	None	
Finishing / Coating	Stoneshield	
Nominal Dimensions (inches & mm)	9" x 60" (228.6 x 1523 mm)	
Actual Dimensions (inches & mm)	9" x 60" (228.6 x 1523 mm)	
Bevel	Micro-Beveled	
Class / ASTM F3261	Class I - Type B(embossed), Grade 1, Backing Class B	
Backing	IXPE Foam	
Gloss Level	5~12	
Classification	Residential / Commercial	
Added Antimicrobial	No	
Backstamp info	None	
CE Certification	Yes	

PACKING SPEC'S	DETAILS	ADDITIONAL INFORMATION
Product dimension (Width, inch & mm)	9" (228.6 mm)	
Product dimension (Length, inch & mm)	60" (1523 mm)	
Pallet Dimensions (L x W x H)	1,600 X 1,000 x 148 mm	
Square feet per plank/tile	3.748	
Square feet per carton	29.981	
Square feet per pallet	1,678.91	
Square feet per container	23,504.76	20 foot container
Weight per sq ft(lbs)	1.745	
Weight per plank/tile (lbs)	6.54	
Weight per carton (lbs)	52.324	
Weight per pallet (lbs)	2,930.12	
Weight per container (lbs)	41,021.69	
Pieces per box	8	
Boxes per pallet	56	
Box Type	Corrugated	
Pallet per container	14	
Boxes per container	784	

PRODUCT PERFORMANCE / TESTING	PERFORMANCE	ASTM REQUIREMENT
ASTM F2055 Size	Passes	As specified ± 0.016 in
ASTM F387 Thickness	Passes	As specified ± 0.008 in (wigh foam
ASTM F2055 Squareness	Passes	Max. 0.010 in.
ASTM F1914 Residual Indentation	Passes	Avg.≤0.007 in. (0.18mm)
ASTM F2199 Dimension Stability	Passes	<0.2%/ lineal ft(305mm)
ASTM F2199 Dimension Stability	Passes	Max. 0.080 in. (2mm)
ASTM F1914 Surface integrity	Passes	No puncture through wear layer / deco into rigid core
ASTM F925 Chemical Resistance	Passes	No change
ASTM F1514 Resistance to Heat	Passes	<8 (delta E) avg.
ASTM F1515 Resistance to Light	Passes	<8 (delta E) avg.
ASTM E648 Critical Radiant Flux	Class 1	Class 1 (>0.45 W/cm²)
ASTM E662 Optical Smoke Density	Passes	<450
ASTM C1028 Slip Resistance	Passes	ADA Compliant(>0.50)
ASTM F970 Static Load	Passes (500 psi with Foam)	250 psi(<0.005")

TECHNICAL INFORMATION / DOCUMENTS	DETAILS	ADDITIONAL INFORMATION
Product Warranty	Lifetime for Residential, 10 Years for Commercial	
Installation Method	Click	
Recommended Adhesive(s)	No Adhesives	
Polished Required (Y/N)	None	

*The warranty covers manufacturing defects and wear-out in the ordinary exercise of due care.



H·FLOR

LX Hausys America, Inc.
900 Circle 75 Parkway, Suite 1500
Atlanta, GA 30339
Toll Free: 1-866-544-4622
www.lxhausys.com

